

KÖLN AIRPORT LINK & WEST RHINE: KÖLN KOBLENZ



1	ROUTE INFORMATION.....	3
1.1	Route Map.....	3
1.2	Route Features.....	3
2	SIFA.....	4
3	PZB SIGNALLING SYSTEM	5
3.1	PZB Track Interface	5
3.2	In-Cab Indicators	6
3.3	Cab Controls	6
3.4	Train Types	7
3.5	Key Controls	7
3.6	Example.....	8
4	ROLLING STOCK - LOCOMOTIVES	11
5	ROLLING STOCK – PASSENGER / FREIGHT	15
6	DRIVING THE BR146.....	19
6.1	146.2 Cab Controls.....	19
6.2	146.0 Cab Controls.....	20
6.3	AFB Train Power Control	21
6.4	Key Controls.....	21
7	DRIVING THE DB BR155	22
7.1	Cab Controls	22
7	CREDITS	24

1 Route Information

1.1 Route Map



1.2 Route Features

- 60 Mile Route between Cologne and Koblenz
- 13 Mile Route between Cologne and Troisdorf (Including 8 Mile Airport Loop)
- 34 passenger stations serving some of West Germany's medieval towns
- Large freight yard at Gremburg (Including Connection to Cologne South / West)
- Large freight yards at Brühl and Bonn-West
- Depot at Cologne Messe / Deutz

2 SIFA

SIFA is short for Sicherheitsfahrschaltung or “Safety Driving Switch”.

The SIFA vigilance alerter is disabled at startup, but can be activated or deactivated by pressing ‘Shift+Enter(Numpad)’. While activated the SIFA light on the cab dashboard is normally switched off. While the train is moving the driver is required to confirm an alarm every 30 seconds.

When the 30 second alarm is triggered the SIFA light on the cab dashboard will illuminate, after an additional 4 seconds an audible alert will sound. After a further 2.5 seconds the emergency brake will be applied. This can be avoided by acknowledging the alarm at any stage by pressing the ‘Enter(Numpad)’ key.

3 PZB Signalling System


PZB stands for Punktförmige Zugbeeinflussung, loosely translated to English this means “Spotwise Train Control”.

Safe distances between trains are managed conventionally through the use of block-based systems. A given line is broken up in to a series of blocks, and trains are permitted (via green or yellow signals) to enter a block. While a train is present in a block the signal permitting entry is set to red, preventing any more trains to enter.

As railways have developed, more complex control systems and in-cab signalling have been implemented to improve the safety of the railways and to ensure that drivers are fully aware of what is happening around them by requiring them to react in certain ways according to what is happening.

PZB is a complex system and requires that you understand the varying speed limits and the requirement to respond promptly to the signalling system.


3.1 PZB Track Interface

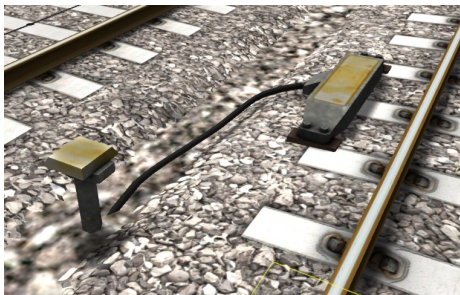

The PZB system incorporates in-cab signalling, this is where the control desk has indicators, alarms and buttons that will react according to the signalling status on the railway. The mechanism by which this works is a series of “balise” magnets placed on the side of the track. An example of one of these magnets is shown in the image on the left.

3.2 In-Cab Indicators


Inside the cab there are lights pertaining to the state of the PZB system as shown in the diagram below:

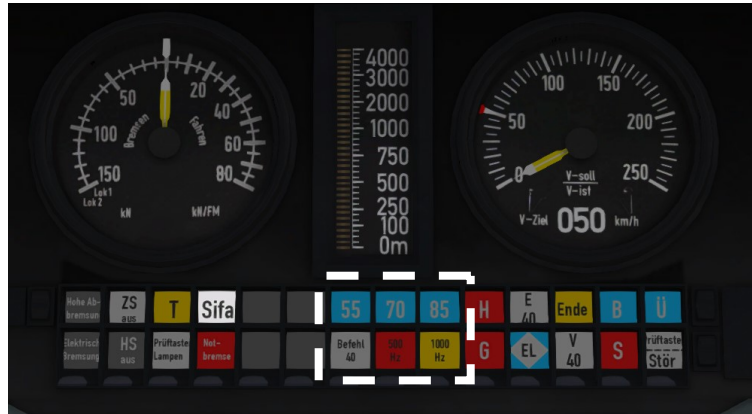

The white-dashed section shows the lamps related to PZB(BR146 controls would be similar but not identical)

3.3 Cab Controls

There are also three controls on the cab desk that you will need to use in order to interact with the PZB system.

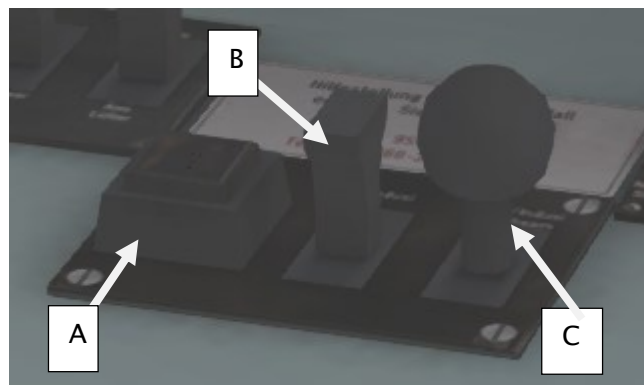

PZB controls on the Cab Desk of a BR101 (BR146 controls would be similar but not identical)

These three controls, to the left of the control desk on the BR101, are named as follows:

- A – German: Befehl40 / English: PZB Override
- B – German: PZB Frei / English: PZB Release
- C – German: PZB Wachsam / English: PZB Acknowledge

3.4 Train Types

The type of train you are driving is important to understanding how PZB actually works and impacts on the speed limits that are imposed while PZB is monitoring your train.

There are three types of train that PZB deals with:

Type O (Obere) - Passenger trains

Type M (Mittlere) – Faster Freight Trains

Type U (Untere) – Slow / Heavy Freight Trains

The implementation of PZB within locomotives supplied with the Köln to Koblenz route automatically determines the correct type of train based on the train type configuration in the scenario. Once PZB is active you can see this in the PZB lamps as follows:

Type O – Lights up the 85 lamp

Type M – Lights up the 70 lamp

Type U – Lights up the 55 lamp

3.5 Key Controls

Function	Keyboard
Activate/Deactivate	Ctrl+Enter(Numpad)
Acknowledge	Page Down
Release	End
Override	Del

3.6 Example

For this example we are driving a passenger train, which is a Type O service; the speed limits indicated in this example are therefore specific to that kind of service and will be different for other types of service.



There are three primary points noted in the diagram above:

- A – The distant signal, usually around 1.2km from the hazard (such as a converging junction)
- B – A point usually about 250m before the guarding signal
- C – The guarding signal, normally placed around 200m before the hazard.


Let's take a look at what happens in this simple example as you begin on the left hand side of the image above and progress along the track until you get to the guarding signal on the right. We'll assume that in this case there is a converging junction set against us and therefore the guarding signal is at a stop indication.



As you approach point A, the Distant Signal will show a Yellow indication to let you know that the signal it is reflecting (at C) is at red indicating danger.

You will also notice that there is a magnet next to this signal. This is called a 1000hz magnet.

As the signal is at anything other than a green indication the magnet will be energised and the PZB system on-board the train will therefore sense its presence. As the train passes over the 1000hz magnet the driver has up to 4 seconds in which to press the PZB Wachsam / PZB Acknowledge key (Page Down). If the driver fails to do this the PZB system will apply emergency brakes to stop the train.



Note that there is no alert in the cab that we have passed over the 1000hz magnet, the driver is expected to be aware that they have passed a distant signal and react accordingly. Once the PZB Wachsam / Acknowledge control is pressed the display will update to indicate that the locomotive is now in a monitored state. As we are a Type O train, the 85 lamp is lit and the 1000hz lamp lights up.

As we pass the 1000hz magnet we must not be exceeding 165km/h, regardless of the line speed. If we are then there is a good chance we will not be able to fully stop before the signal at point C and therefore the PZB system will apply emergency brakes.

We now have 23 seconds in which to decrease our speed to 85km/h. If after 23 seconds we are exceeding this speed then the PZB system will apply emergency brakes.

We now continue on towards the guarded signal at no greater than 85km/h.

After 700 meters, the 1000hz lamp will go out and we will no longer be monitored. Now the driver can make a decision based on what they can see. Can you see the guarded signal and is it still at a danger indication?

If it is then we continue slowing down to stop. If the signal is now showing a clear aspect because the hazard has cleared the driver has the option to release the locomotive from monitoring and they will then be permitted to return directly to line speed. Press the PZB Frei / Release button to do this *before* the train reaches point B or further restrictions are put in place.

Caution: Be careful to ensure that you only release when the signal is clear; if you release and the signal is not clear when you reach Point B the system will assume that you are incapable of safely driving the locomotive and will apply the emergency brakes.

Assuming the signal is still at danger and we haven't released from monitoring, we will then reach Point B. At Point B there is another track magnet; the 500hz magnet.



As we pass the 500hz magnet we must have slowed down to 65km/h or else we might not be able to stop in time for the signal and the emergency brakes will be applied. There is no need to acknowledge the 500hz magnet. At this point, the PZB lamps on the control desk will change to light up the 500hz lamp, indicating the restriction we're now in.

After passing the 500hz magnet we must now decelerate to 45km/h within 153 meters.

Having slowed down to 45km/h, we can draw up safely to the red signal and stop.

If the signal changes to a clear aspect while we are approaching the signal then we must continue with the 45km/h speed limit as we are still being monitored. It is not possible to release (PZB Frei) from monitoring while under a 500hz restriction. This restriction will continue for 250 meters, taking you past the guard signal, after which you will be able to return to line speed. This is the primary reason for releasing from monitoring before Point B (if and only if the signal is seen to be clear), otherwise you would be tied to running past the clear signal at the much reduced speed limit for an extra 250 meters instead of being able to return to normal line speed earlier.

If you pull up to the signal and stop because it is still red you may seek to obtain permission from the controller to pass it at danger. If you need to pass a signal that is still showing a red aspect then you will need to use the Befehl40 (Override) key to do so as you approach the red signal.

At Point C the guard signal has the third and final type of magnet, a 2000hz magnet. This magnet will *always* stop the train if passed and is used to stop trains that pass the signal while it is at danger. Pressing and holding Befehl40 (Override) key *stops* the PZB system from reacting to the 2000hz magnet. Once the 2000hz magnet is detected, the Befehl40 lamp comes on and you will then be restricted to a speed limit of 40km/h. You should remain at this speed until either you have travelled for 2km, or you have passed a signal showing a clear aspect. Once either of these conditions pass you can press PZB Frei to release from monitoring and return to line speed.

Alternately Flashing PZB Indicators


There is an additional state called Restricted Monitoring which may engage while you are travelling under the control of either the 1000hz or 500hz magnets. If you travel below 10km/h for more than 15 seconds or you stop completely at any point, the PZB display will start alternating between two of the speed lamps such as the 70 and 85 lamps, to indicate that restricted monitoring is now in place. Under these circumstances the speed limits to be imposed are reduced further. Full details about speed limits for all types of trains in both normal and restrictive monitoring are below.

PZB Speed Restrictions by Train Type

Type of Train	Normal Monitoring		Restrictive Monitoring	
	1000hz	500hz	1000hz	500hz
O (Obere)	165km/h -> 85km/h In 23 seconds	65km/h -> 45km/h In 153 meters	45km/h constant	45km/h -> 25km/h in 153 meters
M (Mittlere)	125km/h -> 75km/h in 26 seconds	50km/h -> 35km/h In 153 meters	45km/h constant	25km/h constant
U (Untere)	105km/h -> 55km/h In 34 seconds	40km/h -> 25km/h In 153 meters	45km/h constant	25km/h constant

Example Run Graph

Here's a graphical layout of what happened in our example run, indicating the magnets, speed limits and what you would expect to see in the PZB indicator lamps.

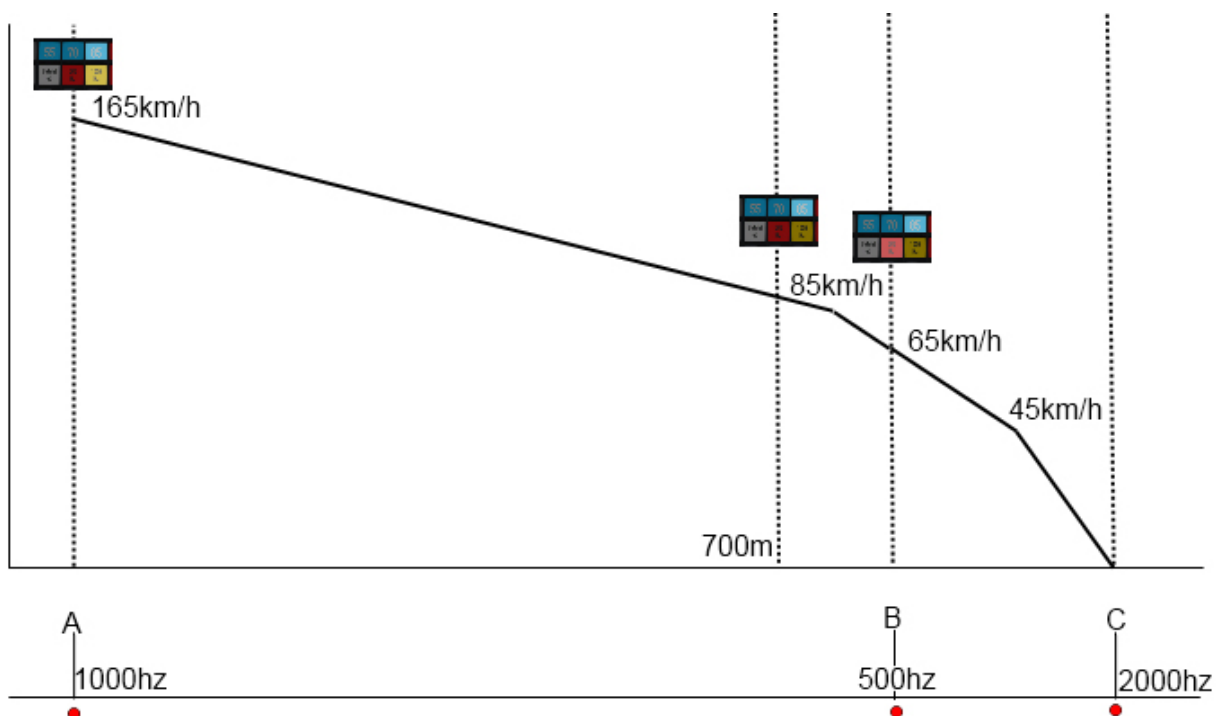

4 Rolling Stock - Locomotives

4.1 BR101 Red



4.2 BR101 Silver



4.3 BR101 Black



4.4 BR146.2



4.5 BR146.0



4.6 DB BR155 – DB Red



4.7 DB BR155 – DB Blue



4.8 DB BR294 – DB Red



5 Rolling Stock – Passenger / Freight

5.1 DBAG Class 423 / 433

- [S13]DB BR 423a / b
- [S13]DB BR 433a / b



5.2 BR146 DABpbzkfa



5.3 BR146 DABpza



5.4 Avmx First IC Red / Bimz Second IC Red



5.5 Avmx First IR Red / Bimz Second IR Red



5.6 Avmx First IR Blue / Bimz Second IR Blue



5.7 Container Freight / Wagon Freight

- SGGRSS A – Blue / DB / Orange / Rusty (Various Container Types)
- SGGRSS B – Blue / DB / Orange / Rusty (Various Container Types)





- Van Shimmms
- Wagon Ssylms (Wood) / Ssylms Steel Pipes / Ssylms Tractors
- [TSR]Samms Wagon / Samms Wagon Loaded



6 Driving the BR146

6.1 146.2 Cab Controls

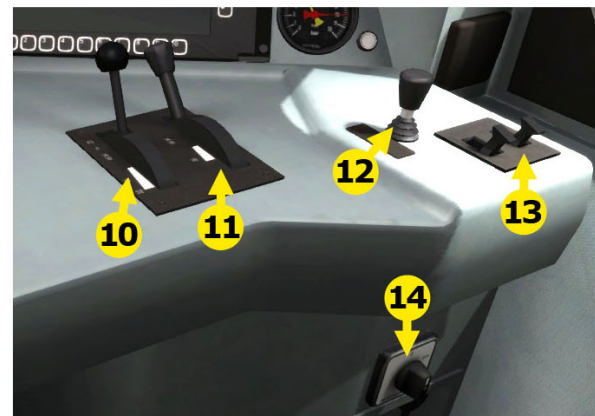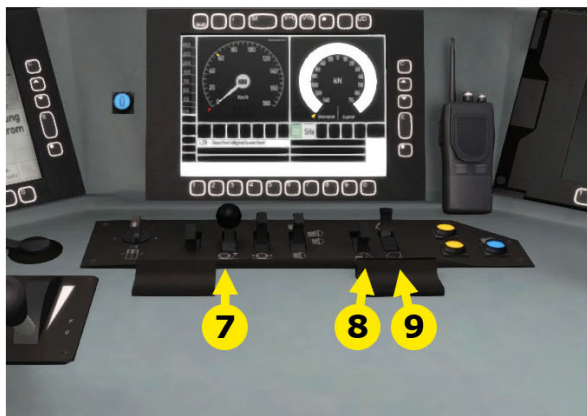

- | | |
|----------------------|-------------------|
| 1. Power Lever | 8. Head lights |
| 2. AFB | 9. Cab Light |
| 3. Direction Control | 10. Train Brake |
| 4. Pantograph | 11. Dynamic Brake |
| 5. PZB/LZB Controls | 12. Engine Brake |
| 6. Emergency Stop | 13. Horn |
| 7. Sander | 14. Wiper |

The Driving Trailer has the same controls and layout in the same position with the exception of the engine brake which is not present in the Driving Trailer.

6.2146.0 Cab Controls



- | | | | |
|---|-----------------|----|-------------------|
| 1 | Emergency Brake | 9 | Instrument Lights |
| 2 | PZB | 10 | Cab Light |
| 3 | Pantograph | 11 | Train Brake |
| 4 | Reverser | 12 | Dynamic Brake |
| 5 | AFB | 13 | Horn |
| 6 | Power Lever | 14 | Wipers |
| 7 | Sander | | |
| 8 | Lights | | |

6.3 AFB Train Power Control

AFB stands for Automatische Fahr- und Bremssteuerung – or loosely translated in to English it means "Automatic Driving and Braking Control".

AFB allows the driver of the locomotive to set the target speed and then the computer in the locomotive will apply the throttle to obtain that speed and then keep applying throttle or brake in order to maintain it. You can almost think of it as a kind of Cruise Control for trains.

To operate AFB, simply follow these steps:

1. Set the AFB control to the desired speed. Note on the speedometer a small red triangle "bug" will slide around to the configured speed.
2. Move the throttle control to the desired level of acceleration, at this point the train will begin moving and accelerate to the configured speed.

All speed changes should be managed with the AFB control, simply change the target speed as required and the AFB Computer will apply throttle and brakes appropriately.


If you wish to come out of AFB control and return to manual control, simply set the target speed to 0km/h and then the throttle and brake controllers will return to normal manual functionality.

6.4 Key Controls

Function	Keyboard
Increase	Y
Decrease	C


7 Driving the DB BR155

7.1 Cab Controls

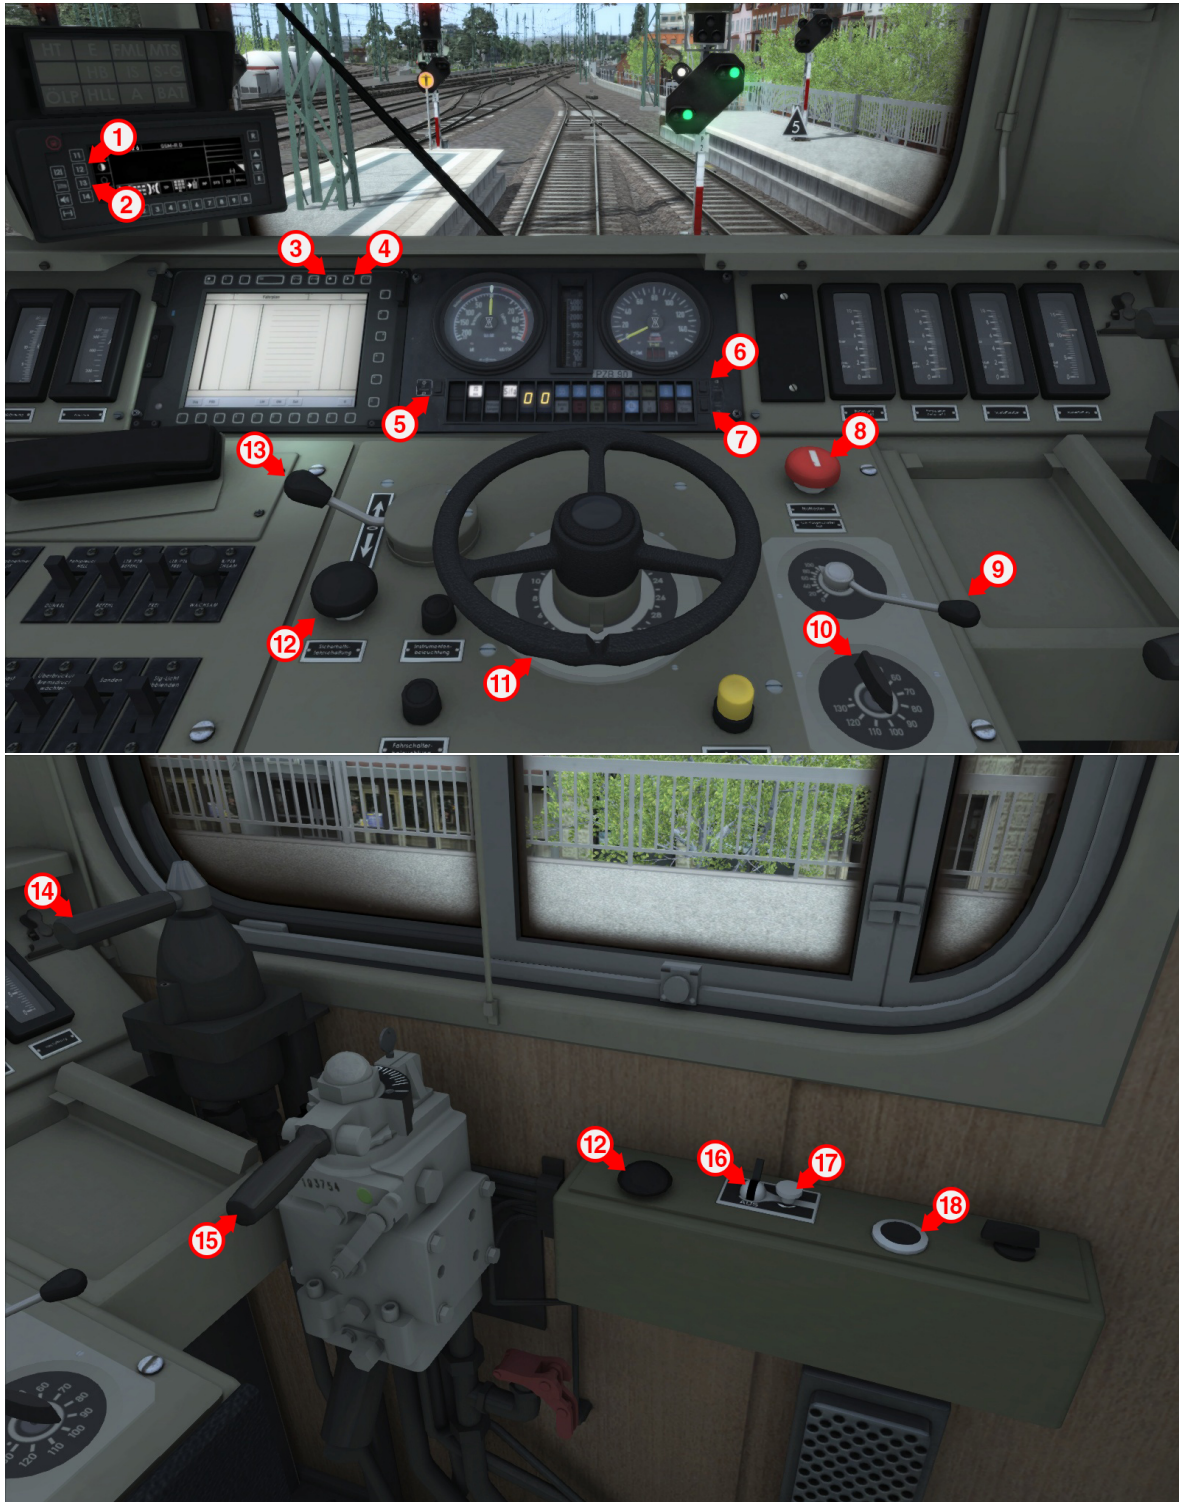

1	GSMR Screen Invert
2	GSMR Button Backlight
3	EBula Button Backlight
4	EBula Screen Invert
5	LED Test
6	Dial Lights
7	LZB Test
8	Emergency Brake
9	Electric Brake Power

10	Power Selector
11	Tap Control
12	Sifa Reset
13	Reverser
14	Direct Brake
15	Train Brake
16	Wipers
17	Wiper Speed
18	Horn

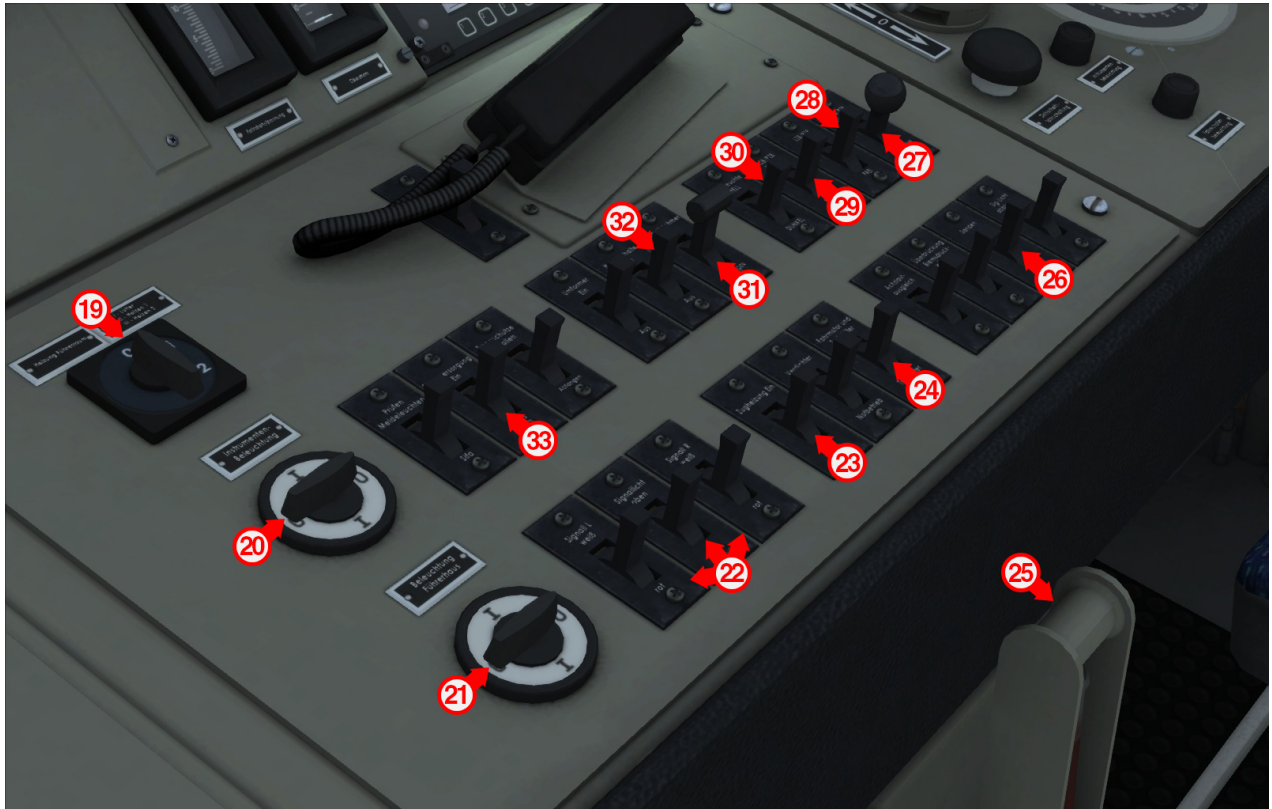

19	Cab Heating
20	Instrument Lights
21	Cab Light
22	Headlights
23	Train Heating
24	Traction Motor Blower
25	Handbrake

26	Sander
27	PZB/LZB Acknowledge
28	PZB/LZB Free
29	PZB/LZB Override
30	Pantograph
31	Circuit Breaker
32	Main Battery

For More information please see the DB BR 155 Manual.

7 Credits

Special Thanks

Dan Barnett

Beta Testing Team